

1. (10 pts) For each question, state which answer is the most appropriate. First one is done for you.

**Questions:**

- 1z. What is this section of the test?      **u**
- 1a. What is synchronous timing?
- 1b. What is Volatile Memory?
- 1c. What is DMA?
- 1d. What is the goal of a multiprogrammed operating system?
- 1e. What is an interrupt?
- 1f. What is a dynamic RAM?
- 1g. What is a flip-flop?
- 1h. What is an Address Translation Lookaside Buffer (or TLB)?
- 1i. What is Constant Angular Velocity?
- 1j. How much did Professor Farrens spend on 200 burnable CD's?

**Answers:**

- a) Memory that retains its contents when the power is turned off.
- b) A small fast memory holding recently accessed data and/or instructions.
- c) Life, the universe, and everything.
- d) A technique used in CD-ROM Drives to increase storage density.
- e) A setup that does not require a clock.
- f) A structure that holds recent mappings of virtual to physical addresses.
- g) An unscheduled subroutine call.
- h) The ability of an I/O device to read from and write to memory without processor assistance
- i) One penny.
- j) A setup that requires the use of a clock.
- k) Memory that loses its values when the power is turned off.
- l) A circuit that exhibits purely sequential behavior.
- n) A binary digit appended to a group of binary digits to make the sum of all the digits an even number.
- o) Two dollars.
- p) To maximize the efficient use of an expensive resource (the CPU).
- q) An integral part of an adder circuit.
- r) An atomic unit.
- s) A type of memory that uses capacitors to store data.
- t) A technique used in disk drives to reduce seek time.
- u) Boring!!



4. (5) What is the goal of the memory hierarchy? What principle makes it possible to achieve this goal? Give the two types, and explain what they are.

5. (5) What is Cache Coherence, and why is it important? Is it a concern only in parallel computer systems? Why or why not?

6. (4) What is memory-mapped I/O? What is the alternative? What significant change must be made to the computer to support the alternative?

7. (5) Caches can be either Virtually or Physically Addressed. Explain the difference, and give one advantage and one disadvantage to using Physically addressed caches.

8. (4) Given a logical 27-bit address and a 512Kbyte physical memory for a byte-addressable machine,

How big is the physical address space?

How big is the virtual address space?

Assuming 16K-byte pages, how many page frames are there? How many pages? How many bits wide is the page table?

Assuming 2K-byte pages, how many page frames are there? How many pages? How many bits wide is the page table?

9. (10 pts) Here is a 12-bit Error Correction code format (same one used in class):

$$d_8 \ d_7 \ d_6 \ d_5 \ C_4 \ d_4 \ d_3 \ d_2 \ C_3 \ d_1 \ C_2 \ C_1$$

- a. Given the *data* bit pattern

**00101101**

in a machine using the above ECC code, what bit pattern gets sent to memory? (No credit will be given without work being shown.)

- b. In this same machine, the following bit pattern is retrieved from memory:

**010011101110**

Assuming the above Error Correction code format, identify and correct any errors that may have occurred during transmission or storage. (No credit will be given without work being shown.)

10. (10 pts) Assuming rising edge-triggered flipflops, what is the maximum clock frequency possible for the following circuit? (In other words, what is the maximum clock frequency that will still guarantee correct behavior?) Use the following delay values, and assume all input signals become valid at time 0. ( $T_{prop}$  is the propagation time for the flipflop, the time it takes from the rising edge of the clock until the output of the FF is valid.)


AND: 4ns OR: 2ns NAND: 5ns NOR: 6ns NOT: 1ns MUX: 5ns

$T_{prop}$  (TFF): 9ns  $T_{setup}$  (TFF): 4ns  $T_{hold}$  (TFF): 1ns

$T_{prop}$  (DFF): 7ns  $T_{setup}$  (DFF): 3ns  $T_{hold}$  (DFF): 1ns


$T_{prop}$  (JKFF): 8ns  $T_{setup}$  (JKFF): 2ns  $T_{hold}$  (JKFF): 1ns

**Note:** You must show the path in order to get credit.

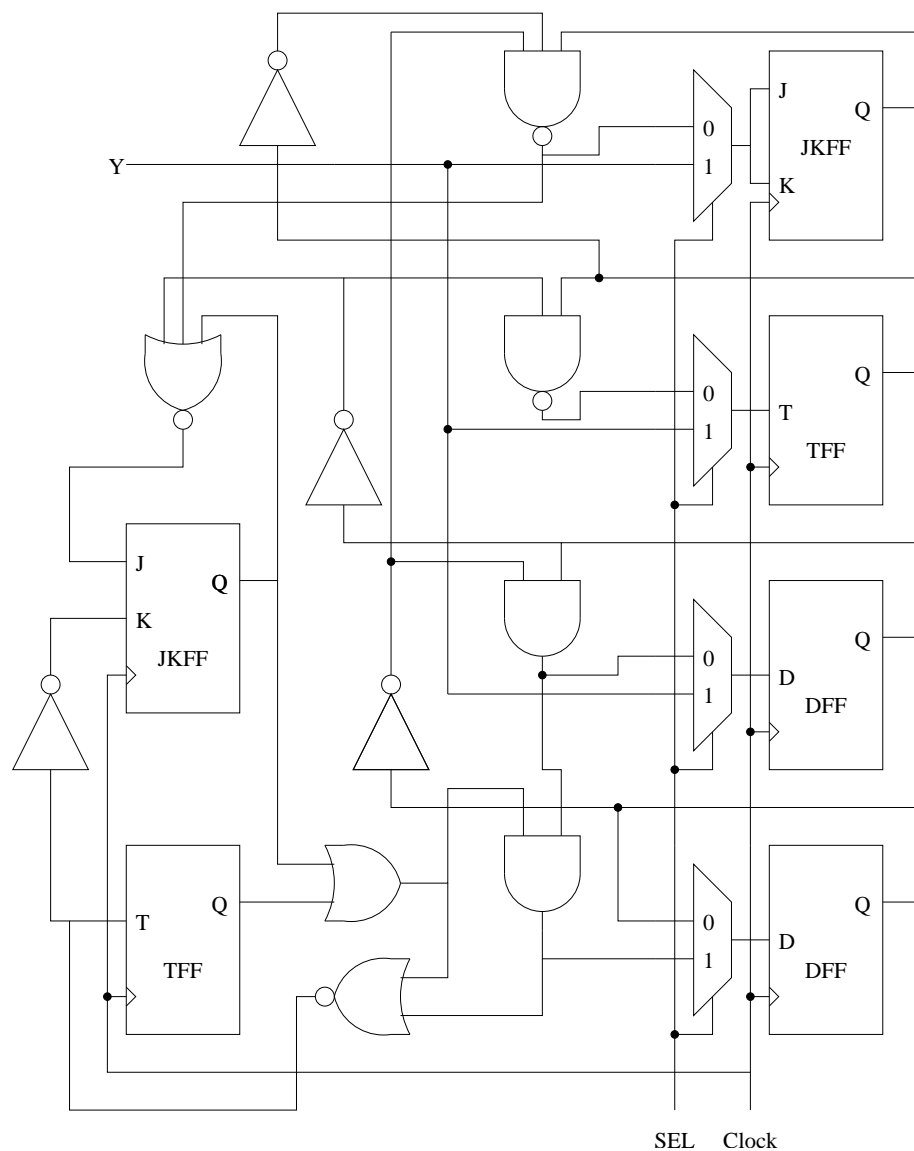


11. (9 pts) A Master I/O device wishes to do a read from a slave device. It asserts the Address Bus lines and the Read Request line, and then raises its Master Synchronizing line to indicate the desired operation is to take place.

You are to draw (approximately) when the data lines will change, draw in the appropriate arrows indicating which transition causes which, and then explain in words what is happening during the handshaking.

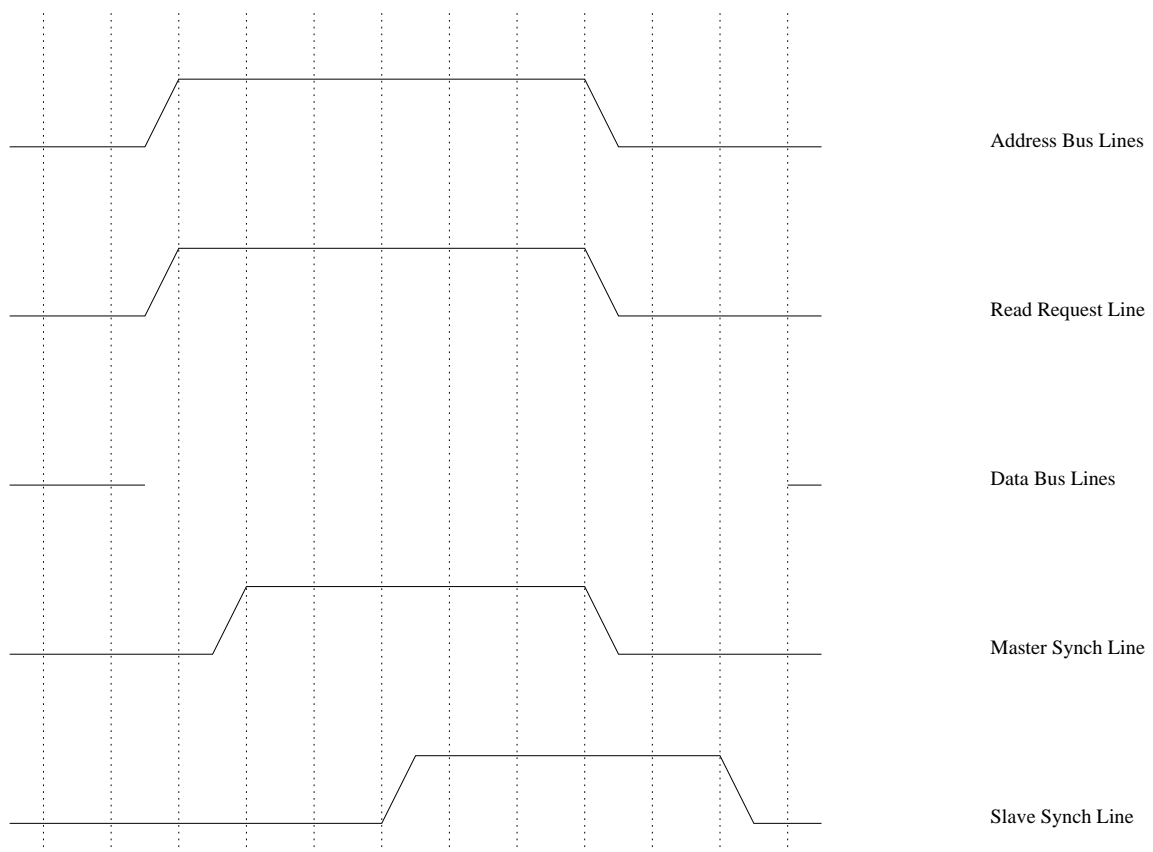

12. (9 pts) Add the connections to the following diagram necessary to create a 12Kx16 memory. Not all of the hardware shown is required to perform this task.

CS - Chip Select  
 OE - Output Enable  
 RD - Read (Read/Write, technically)

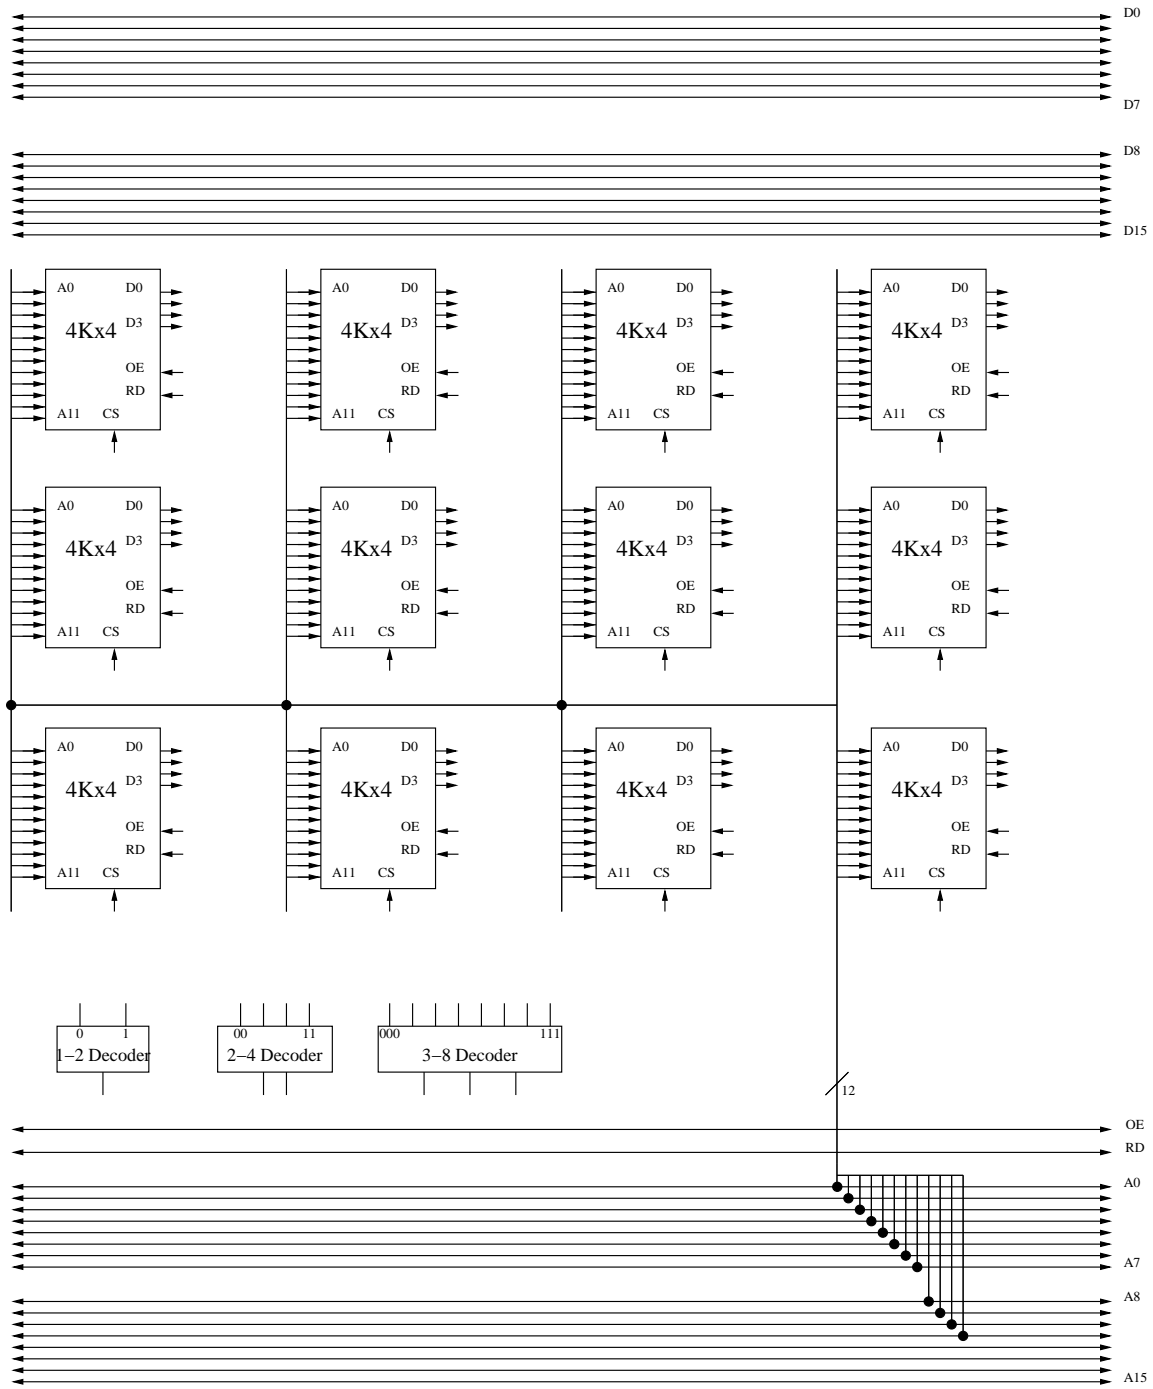



13. (18) The Outtel Corporation has just announced a new machine, the y87. It is a byte-addressable computer with a 16-bit word size and 256 bytes of memory. In this machine accessing main memory takes 6 clock cycles (in addition to the time necessary to do a cache lookup), and the bus between main memory and the processor is 8-bits wide. In order to improve performance, they are considering adding a 16-byte physically addressed Direct-Mapped cache with a line size of 2 words and an access time of 1 cycle. Given the following address reference sequence (in Hex):

**0xB5,0x36,0x37,0xCB,0x34**

a) Write down how you are partitioning each address (which bits are the Tag, offset, etc.)

b) In the table below, fill in the proposed Cache's Tag values after each memory reference has been processed. If it is a hit, mark the entry number to indicate this, and if it is a miss enter what the new tag should be. (X indicates the entry is invalid). There may be more Tag Array entries than you need.

Tag Array Entry Number	Contents of Tag Array after processing address (Time -> )					
	Initial Contents	0xB5 (10110101)	0x36 (00110110)	0x37 (00110111)	0xCB (11001011)	0x34 (00110100)
0	X					
1	X					
2	X					
3	X					
4	X					
5	X					
6	X					
7	X					
8	X					
9	X					
10	X					
11	X					
12	X					
13	X					
14	X					
15	X					

What four memory addresses are sent to memory on the first miss?

What is the Average Memory access time for this sequence of references?

14. (16) Outtel Corporation decided to experiment with using a 12-byte 3-way Set Associative Cache (instead of the Direct-mapped Cache) with a line size of 1 word. Remember, the y87 is a byte-addressable machine with a 16-bit word size, an 8-bit bus between processor and memory, and a Main Memory access time of 6 cycles (in addition to the time necessary to to a cache lookup). The Cache access time is still 1 cycle. Given the same address reference sequence (in Hex) as before:

**0xB5,0x36,0x37,0xCB,0x34**

a) Write down how you are partitioning each address (which bits are the Tag, offset, etc.)

b) In the table below, fill in the proposed Cache's Tag values after each memory reference has been processed. If it is a hit, put an "H" in the tag field, and if it is a miss write down what the new tag should be. Use an LRU replacement scheme, and after each address is processed be sure to indicate the age of the references. There may be more entries than you need. MRU = Most Recently Used, LRU = Least Recently Used.

Tag Array				Contents of Tag Array after processing address (Time -> )									
Set #	Entry #	Initial contents		0xB5 (10110101)		0x36 (00110110)		0x37 (00110111)		0xCB (11001011)		0x34 (00110100)	
		Age	Tag	Age	Tag	Age	Tag	Age	Tag	Age	Tag	Age	Tag
0	0	MRU	001101										
	1	LRU	101110										
	2		101000										
1	0		000100										
	1	MRU	000001										
	2	LRU	111100										
2	0	LRU	110100										
	1		101001										
	2	MRU	010110										
3	0	LRU	100010										
	1		000111										
	2	MRU	000110										

What is the Average Memory access time for this sequence of references?

15. (6 pts) The following tables contain some of the information about a segmented, paged virtual memory system and certain select memory locations. Total physical memory size is 16K bytes, and the page size is 1024 bytes. All numbers in this table are in Hex unless otherwise noted.

Segment Table		
Entry Number	Presence Bit	Page Table
0	1	5
1	0	0
2	1	0
3	1	7
4	1	2
5	1	3
6	1	1
7	1	4

Page Table 0			
Entry Number	Present? (1=Yes)	Disk Addr	Frame Number
0	1	1234123	0x4
1	0	0893748	0x7
2	1	2489567	0x1
3	1	9623873	0x5
7	1	B0F6BD3	0x2
10	0	32829AA	0x1
12	1	56D87AC	0x0
15	1	10A876D	0x6

Page Table 2			
Entry Number	Present? (1=Yes)	Disk Addr	Frame Number
0	1	1234123	0x1
1	0	0893748	0x3
2	1	2489567	0x5
3	1	9623873	0x7
4	1	BC56BD3	0x9
5	0	832759E	0x2
11	1	46B37AC	0x4
15	1	810476D	0x6

Memory	
Address	Contents
0x00A4	0x76
0x01A4	0x73
0x02A4	0x32
0x03A4	0x46
0x04A4	0x30
0x2AA4	0x29
0x05A4	0xa9
0x09A4	0x74
0x0AA4	0x05
0x0CA4	0x23
0x0DA4	0xE3
0x17A4	0xAE
0x26A4	0x92

Page Table 5			
Entry Number	Present? (1=Yes)	Disk Addr	Frame Number
0	1	1234123	0x5
1	0	0893748	0x3
5	0	2489567	0x4
7	1	9623873	0x4
11	1	AE76BD3	0x6
13	0	328759A	0x7
14	1	11D87BE	0x2
15	1	91C875D	0x0

Page Table 7			
Entry Number	Present? (1=Yes)	Disk Addr	Frame Number
0	1	1234123	0x5
1	0	0893748	0x6
2	1	2489567	0x1
3	1	9623873	0x2
4	1	AE76BD3	0x4
5	1	328759A	0x0
6	1	56D87AC	0x3
7	1	10A876D	0x6

For each of the following convert the virtual address into a physical address (if possible) and write down the value of the memory location corresponding to the address. If it is not possible to do so, explain why.







**0x3AA4 (0011101010100100 in binary).**

**0x54A4 (0101010010100100 in binary).**

**0x3CA4 (1100010010100100 in binary).**

16. (16) Given the following table, draw the Karnaugh maps for  $Y1'$ ,  $Y2'$ , and  $Y3'$  and  $Z$  in terms of  $X$ ,  $Y1$ ,  $Y2$  and  $Y3$ , and then write **minimum** boolean equations for each.

Present State (Y1 Y2 Y3)	Next State		Output	
	X=0 (Y1' Y2' Y3')	X=1 (Y1' Y2' Y3')	X=0	X=1
000	100	001	0	0
001	101	001	0	0
010	101	001	0	1
011	100	001	0	0
100	000	000	1	1
101	011	011	1	1
110	001	001	1	0



17. (15 pts) Given the following Karnaugh maps, implement the sequential machine using an SR FF for Y1, a JK FF for Y2, and a T FF for Y3. You do not need to draw the gates, but you do need to write down the **minimized** input equations for each of the inputs of each of the Flip Flops in the circuit.

